




## つばなしアイボルト(化粧板付) S306RN




●カットアンカーは鉄製です。  
ステンレス製は別途ご用意下さい。

(mm)

品番 (右ネジ)	品番 (左ネジ)	D	L	B	S	捻径	ドリル径
RNSIB-9R	RNSIB-9L	9	20	28	40	W-3/8	14.5
RNSIB-13R	RNSIB-13L	13	25	36	55	W-1/2	18
RNSIB-16R	RNSIB-16L	16	25	40	55	W-5/8	23

●カットアンカー付き


## Uボルト S413



(mm)

品番	D	L1	L2	L3	B	W1	W2	捻径	重量(g)	使用荷重(kg)
UB-4	4	59	20	39	30	26	30	M-4	20	20
UB-5	5	73	26	47	40	30	35	M-5	30	30
UB-6	6	84	28	56	45	29	35	M-6	50	50
UB-8	7	94	32	62	49	27	35	M-8	98	80
UB-10	10	121	44	77	55	40	50	M-10	200	150
UB-12	12	138	54	84	65	48	60	M-12	332	220


## アイスクリュウ S3200



(mm)

品番	D	L	H	B	E	重量(g)	使用荷重(kg)
STS-3	3.5	8.5	17.5	20	2.8	5	15
STS-4	4	10	20	25	4	7	20
STS-5	5	13	26	30	5	14	30

## ロングアイボルトA型 S2221

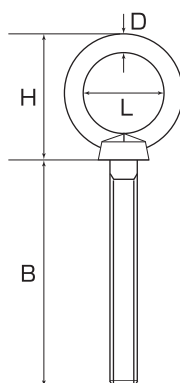

(mm)

品番	D	L	H	B	捻径	重量(g)	使用荷重(kg)
LAA-6 X40	5	16	27	40	M-6	18	50
X60	5	16	27	60	M-6	20	50
X80	5	16	27	80	M-6	25	50
X100	5	16	27	100	M-6	30	50
LAA-8 X60	7	19	34	60	M-8	50	80
X80	7	19	34	80	M-8	55	80
X100	7	19	34	100	M-8	65	80
X120	7	19	34	120	M-8	70	80
LAA-10X80	8	25	40	80	M-10	95	150
X100	8	25	40	100	M-10	105	150
X120	8	25	40	120	M-10	115	150
X140	8	25	40	140	M-10	125	150
LAA-12X100	10	29	50	100	M-12	175	220
X120	10	29	50	120	M-12	190	220
X140	10	29	50	140	M-12	205	220

※ナット・ワッシャー各1個付