



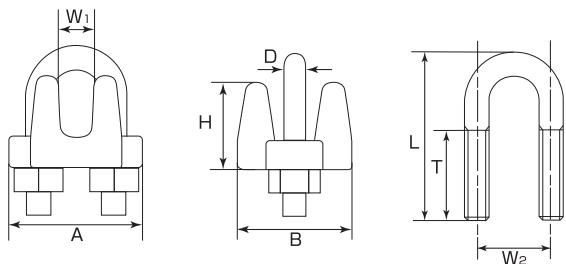

ワイヤークリップ


S260




品番	D	W1	A	B	H	L	T	W2	捻子径	使用 ロープ径	重量(g)
WC-2	2.5	3	14	14.5	11.5	17	10	6.5	M-3	2	8
WC-3	2.5	3.5	16	15	12.7	21	13	8.5	M-3	3	9
WC-4	3.5	4.5	19	18	14	23	14	10.5	M-4	4	18
WC-5	4.5	5.5	22	20	15	26	15	12.5	M-5	5	24
WC-6	5.2	6.5	27	22	17.5	33	19	13.2	M-6	6	38
WC-8	7	8.5	34	28	20.7	42	23	17	M-8	8	81
WC-10	9	10.5	45	36	23.7	52	28	21	M-10	10	151
WC-12	10.6	12	50	39	27.5	60	35	27	M-12	12	231
WC-14	10.6	13	52	45	31	68	40	28.6	M-12	14	285
WC-16	12.6	17	60	48	35	80	41	30	M-14	16	408
WC-19	12.6	20	62	53	39	85	47	35.4	M-14	19	478

板型ワイヤークリップ シングル

S511



※使用方法




ふたを締めナットで止めます。

品番	B	L	使用 ロープ径	重量(g)
BWC-2	11	15	1.5	5
BWC-3	14	17	2	7
BWC-4	17	20	3	13
BWC-5	20	25	4	15
BWC-6	24	30	5	25
BWC-8	30	37	6	54
BWC-10	35	48	8	88

板型ワイヤークリップ ダブル

S512



品番	B	L	使用 ロープ径	重量(g)
BWC-2W	11	30	1.5	10
BWC-3W	14	35	2	14
BWC-4W	17	40	3	25
BWC-5W	20	50	4	29
BWC-6W	24	60	5	50
BWC-8W	30	75	6	100
BWC-10W	35	95	8	170